


Read carefully before installation



www.elmarkholding.eu

IP40 / IP44

LED PANEL ROUND

Model	W	K	lm	lm/W	Beam angle	Size (mm)		
						D	H	D1
99XLED610	6	2700	330	70lm/W	120°	120	21	150
99XLED609	6	4000	330	70lm/W	120°	120	21	150
99XLED609CW	6	6400	330	70lm/W	120°	120	21	150
99XLED612	12	2700	840	70lm/W	120°	170	21	164
99XLED611	12	4000	840	70lm/W	120°	170	21	164
99XLED611CW	12	6400	840	70lm/W	120°	170	21	164
99XLED615	18	2700	1350	70lm/W	120°	225	21	205
99XLED614	18	4000	1350	70lm/W	120°	225	21	205
99XLED614CW	18	6400	1350	70lm/W	120°	225	21	205
99XLED621	24	2700	1800	70lm/W	120°	295	21	280
99XLED620	24	4000	1800	70lm/W	120°	295	21	280
99XLED620CW	24	6400	1800	70lm/W	120°	295	21	280



Model	W	K	lm	lm/W	Beam angle	Size (mm)		
						D	H	D1
99LED609IP44CW	5	6500	400	80lm/W	120°	105	21	90
99LED609IP44	5	4000	400	80lm/W	120°	105	21	90
99LED611IP44CW	12	6500	960	80lm/W	120°	145	21	130
99LED611IP44	12	4000	960	80lm/W	120°	145	21	130
99LED617IP44CW	18	6500	1440	80lm/W	120°	225	21	205
99LED617IP44	18	4000	1440	80lm/W	120°	225	21	205

LED PANEL SQUARE

Model	W	K	lm	lm/W	Beam angle	Size (mm)						
						L	H	W	L1	W1		
99XLED633	12	2700	840	70lm/W	120°	174	21	174	164	164		
99XLED632	12	4000	840	70lm/W	120°	174	21	174	164	164		
99XLED632CW	12	6400	840	70lm/W	120°	174	21	174	164	164		
99XLED635	18	2700	1260	70lm/W	120°	225	21	225	205	205		
99XLED634	18	4000	1260	70lm/W	120°	225	21	225	205	205		
99XLED634CW	18	6400	1260	70lm/W	120°	225	21	225	205	205		
99XLED637	24	2700	1680	70lm/W	120°	300	21	300	280	280		
99XLED636	24	4000	1680	70lm/W	120°	300	21	300	280	280		
99XLED636CW	24	6400	1680	70lm/W	120°	300	21	300	280	280		
99XLED969	18	4000	1350	70lm/W	120°	220	32	220	-	-		
99XLED970	24	4000	1800	70lm/W	120°	300	32	300	-	-		

Model	W	K	lm	lm/W	Beam angle	Size (mm)						
						L	H	W	L1	W1		
99XLED633E	12	2700	840	70lm/W	120°	174	21	174	164	164		
99XLED632E	12	4000	840	70lm/W	120°	174	21	174	164	164		
99XLED632CWE	12	6400	840	70lm/W	120°	174	21	174	164	164		
99XLED635E	18	2700	1260	70lm/W	120°	225	21	225	205	205		
99XLED634E	18	4000	1260	70lm/W	120°	225	21	225	205	205		
99XLED634CWE	18	6400	1260	70lm/W	120°	225	21	225	205	205		
99XLED637E	24	2700	1680	70lm/W	120°	300	21	300	280	280		
99XLED636E	24	4000	1680	70lm/W	120°	300	21	300	280	280		
99XLED636CWE	24	6400	1680	70lm/W	120°	300	21	300	280	280		
99XLED969E	18	4000	1350	70lm/W	120°	220	32	220	-	-		
99XLED970E	24	4000	1800	70lm/W	120°	300	32	300	-	-		

Scheme of lighting fixture with emergency block

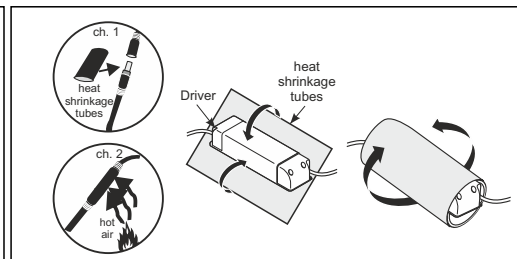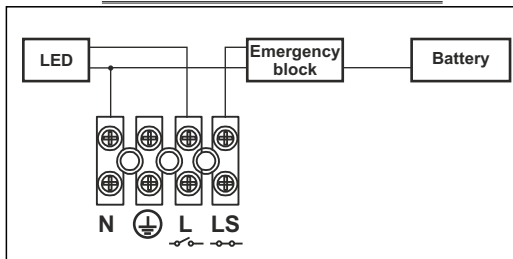

Read carefully before installation



www.elmarkholding.eu



Продукт, който не може да бъде разглобен за проверка. Без да се наруши целостта на светлинния източник.

A containing product that you cannot disassemble for control measurement of the light source without the risk of damaging the light source.

IP40

- (BG) Инструкция за монтаж и експлоатация
- (EN) Instruction for installation and use
- (RO) Instrucțiune de instalare și utilizare
- (SRB) Uputstvo za ugradnju i upotrebu
- (HR) Uputstvo za ugradnju i upotrebu
- (BIH) Uputstvo za ugradnju i upotrebu
- (HU) Szerelési és kezelési utasítás
- (SLO) Navodilo za vgradnjo in uporabo
- (GR) Οδηγεια για την εγκατασταση και τη χρηση
- (MK) Упатство за вградување и употреба
- (SK) Návod na montáž a používanie
- (PL) Instrukcja instalacji i użytkowania
- (P) Instrução para instalação e uso
- (IT) Istruzioni per l'installazione e l'uso


- (BG) LED панели
- (EN) LED panels
- (RO) Panou cu LED
- (SRB) LED Panel - četvrtasti, okrugli
- (HR) LED paneli
- (BIH) LED Panel - četvrtasti, okrugli
- (HU) LED Panel négyszög alakú
- (SLO) LED paneli
- (GR) Πάνελ LED τετράγωνο, στρόγγυλο
- (MK) LED панели
- (SK) LED panely
- (PL) Panele LED
- (P) Painéis de LED
- (IT) Pannelli a LED

LED PANEL ROUND ECO SERIES

Model	W	K	lm	lm/W	Beam angle	Size (mm)		
						D	H	D1
99LED960CW	6	6400	510	85lm/W	160°	120	10	105
99LED960	6	4000	510	85lm/W	160°	120	10	105
99LED960WW	6	3000	510	85lm/W	160°	120	10	105
99LED961CW	12	6400	1020	85lm/W	160°	165	10	155
99LED961	12	4000	1020	85lm/W	160°	165	10	155
99LED961WW	12	3000	1020	85lm/W	160°	165	10	155
99LED962CW	18	6400	1530	85lm/W	160°	225	10	210
99LED962	18	4000	1530	85lm/W	160°	225	10	210
99LED962WW	18	3000	1530	85lm/W	160°	225	10	210
99LED963CW	24	6400	2040	85lm/W	160°	300	10	285
99LED963	24	4000	2040	85lm/W	160°	300	10	285
99LED963WW	24	3000	2040	85lm/W	160°	300	10	285
99LED964CW	28	6400	2500	85lm/W	160°	355	10	345
99LED964	28	4000	2500	85lm/W	160°	355	10	345
99LED964WW	28	3000	2500	85lm/W	160°	355	10	345
99LED971	6	4000	420	70lm/W	120°	120	13	105
99LED972	12	4000	840	70lm/W	120°	175	13	168
99LED973	18	4000	1260	70lm/W	120°	225	13	205
99LED974	24	4000	1680	70lm/W	120°	300	13	280
99LED617D*	21	4000	1680	70lm/W	120°	225	13	205

LED PANEL ROUND

Model	W	K	lm	lm/W	Beam angle	Size (mm)		
						D	H	D1
99LED609CW	6	6400	480	80lm/W	120°	105	21	90
99LED609	6	4000	480	80lm/W	120°	105	21	90
99LED610	6	3000	480	80lm/W	120°	105	21	90
99LED612T	9	3000	720	80lm/W	120°	145	21	132
99LED611CW	12	6400	960	80lm/W	120°	145	21	130
99LED611	12	4000	960	80lm/W	120°	145	21	130
99LED612	12	3000	960	80lm/W	120°	145	21	130
99LED617TCW	18	6400	1440	80lm/W	120°	225	21	205
99LED618T	18	3000	1440	80lm/W	120°	225	21	205
99LED617T	18	4000	1440	80lm/W	120°	225	21	205
99LED618	21	3000	1680	80lm/W	120°	225	21	205
99LED621T	24	3000	1920	80lm/W	120°	300	21	270
99LED620T	24	4000	1920	80lm/W	120°	300	21	270
99LED620TCW	24	6400	1920	80lm/W	120°	300	21	270
99LED628	8	4000	640	80lm/W	120°	120	21	100
99LED629	8	3000	640	80lm/W	120°	120	21	100
99LED630	21	4000	1680	80lm/W	120°	225	21	205
99LED631	21	3000	1680	80lm/W	120°	225	21	205

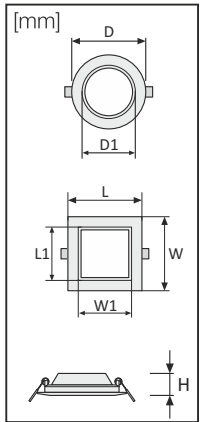

LED PANEL SQUARE

Model	W	K	lm	lm/W	Beam angle	Size (mm)						
						L	H	W	L1	W1		
99LED967CW	12	6400	960	80lm/W	120°	175	13	175	155	155		
99LED967	12	4000	960	80lm/W	120°	175	13	175	155	155		
99LED967WW	12	3000	960	80lm/W	120°	175	13	175	155	155		
99LED968CW	18	6400	1440	80lm/W	120°	225	13	225	205	205		
99LED968	18	4000	1440	80lm/W	120°	225	13	225	205	205		
99LED968WW	18	3000	1440	80lm/W	120°	225	13	225	205	205		
99LED969CW	18	6400	1420	80lm/W	120°	220	32	220	-	-		
99LED969	18	4000	1420	80lm/W	120°	220	32	220	-	-		
99LED969WW	18	3000	1420	80lm/W	120°	220	32	220	-	-		

Model	W	K	lm	lm/W	Beam angle	Size (mm)						
						L	H	W	L1	W1		
99LED967CWE	12	6400	960	80lm/W	120°	175	13	175	155	155		
99LED967E	12	4000	960	80lm/W	120°	175	13	175	155	155		
99LED967WWE	12	3000	960	80lm/W	120°	175	13	175	155	155		
99LED968CWE	18	6400	1440	80lm/W	120°	225	13	225	205	205		
99LED968E	18	4000	1440	80lm/W	120°	225	13	225	205	205		
99LED968WWE	18	3000	1440	80lm/W	120°	225	13	225	205	205		
99LED969CWE	18	6400	1420	80lm/W	120°	220	32	220	-	-		
99LED969E	18	4000	1420	80lm/W	120°	220	32	220	-	-		
99LED969WWE	18	3000	1420	80lm/W	120°	220	32	220	-	-		

